
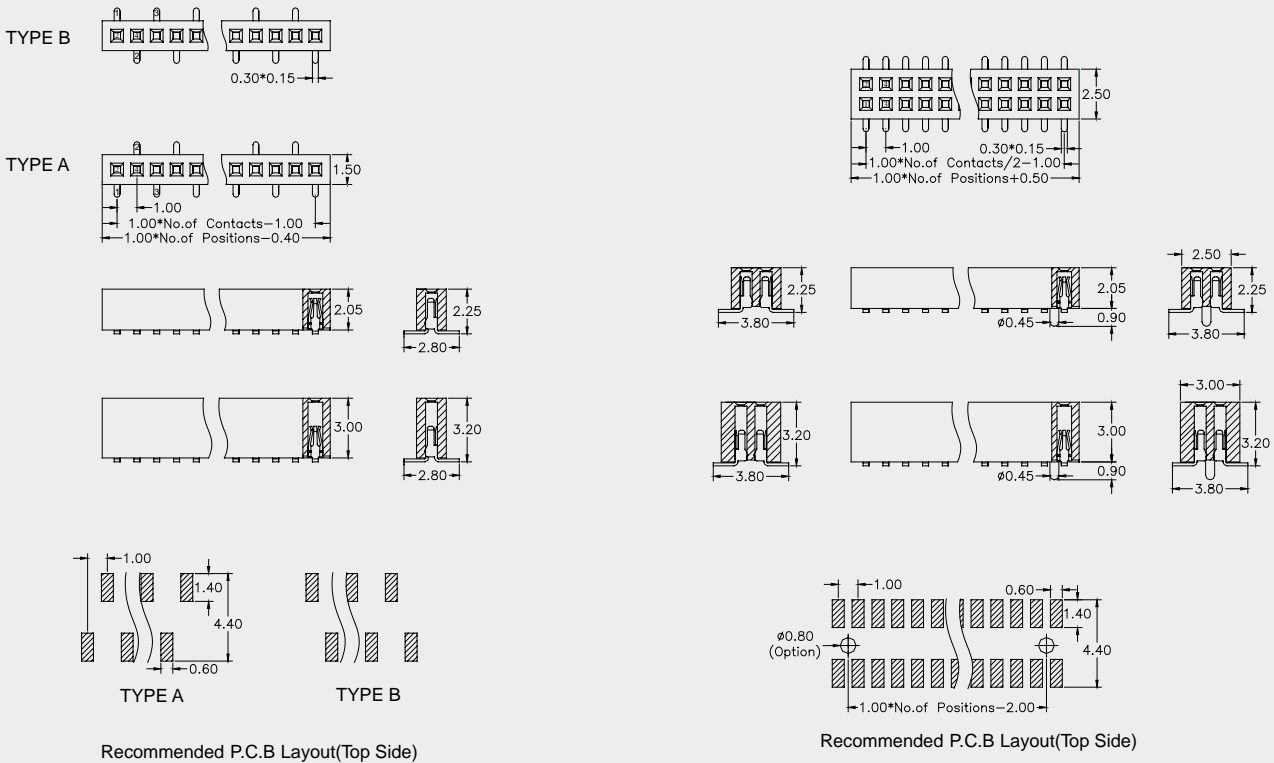
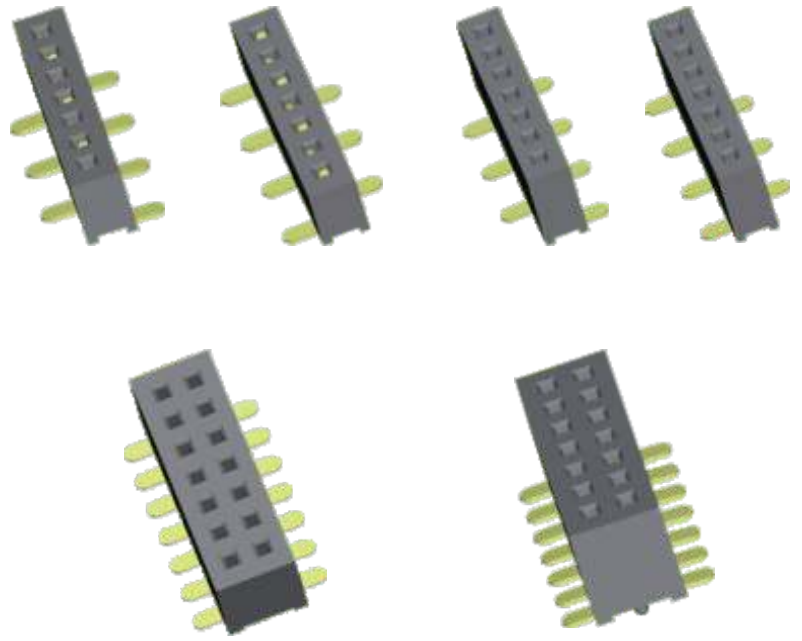


SPECIFICATIONS

Current rating 1.00 A
 Contact resistance: 15m Ohm max.
 Insulation Resistance: 1000M Ω Min.
 Withstanding Voltage : 500V AC/Minute
 Operation Temperature: -55°C to +125°C
 Contact Material: Phosphor Bronze
 Contact plating: Au or Sn Over Ni
 Insulator Material: Polyester (UL94V-0)
 Standard: PA6T+30%GF

Tube Packing



1	120207	Logo changed	rok
REV	DATE	NOTE	NAME